


Italdoor and Woodworking Limited
120 Cartwright Avenue, North York, M6A 1V2
(416) 780-9820 Fax (416) 780-9822 E-Mail: sales@italdoor.com Web: www.italdoor.com

Factory: 23 Cedar Avenue, Thornhill, Ontario, L3T 3W1 Fax: (905) 889-6785 (Appointments Required)

ITWH20 Shop Drawing (Solid Core)

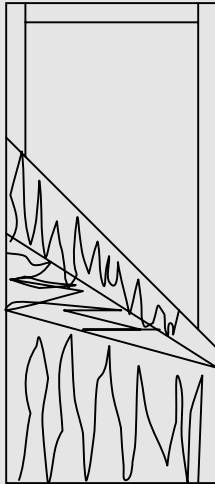

IT3000

Options:

- Machine for all hinges & handles, get registered label.
- Without machining, ink stamp verifies rating.

Type:	Interior Commercial.
Conforming Standards:	A.W.I. SECTION 1300 N.W.W.D.A. SERIES 1.S.1. CSA 0312.2 SERIES 90
Thickness:	1-3/8" 1-3/4" & 2" (38mm, 46mm, 50mm)
Maximum Size:	47-3/4 x 117"
Fire Rating:	20 minute, Underwriter: Warnock Hersey
Stiles:	3/4" (19mm) edges matching face, laminated to 1-3/8" (35mm) hardwood
Rails:	1-7/16" (36mm) semi or hardwood
Core:	Solid particle core with density of 29 PCF (449 KCM) Conforms with CSA-188 and ANSI A208.1
Adhesive:	Type II, Hot Press
Face:	Commercially available 1/8" (3mm) including crossband, any hardwood or hardboard, or plastic laminate.
Vision Panels:	Maximum Square Inches: 1296 Maximum lite height: 40" Minimum between glass & door edge/lock prep: 5-1/2" Stops, by Dorma, wood.
Notes:	Stile & rail dimensions are book size. Dimensions may vary with door sizing.
Warranty:	Standard Door Manufacturer's, See Warranty for Details.